




Pre-65 Pre-6515 Pre-85 & Pre-8515 Installation Instructions


Slide bracket along straps to achieve desired position.
The straps have perforations running their length with one inch spacing.

The bracket has a series of 8 indexing holes per strap location allowing it to be indexed at 1/8" intervals, as the bracket slides along the straps note that with each 1/8" of travel one of the 8 indexing holes comes into alignment with one of the 1" spaced holes on the strap.

Sheet metal screws are provided to fasten the bracket in the desired location.

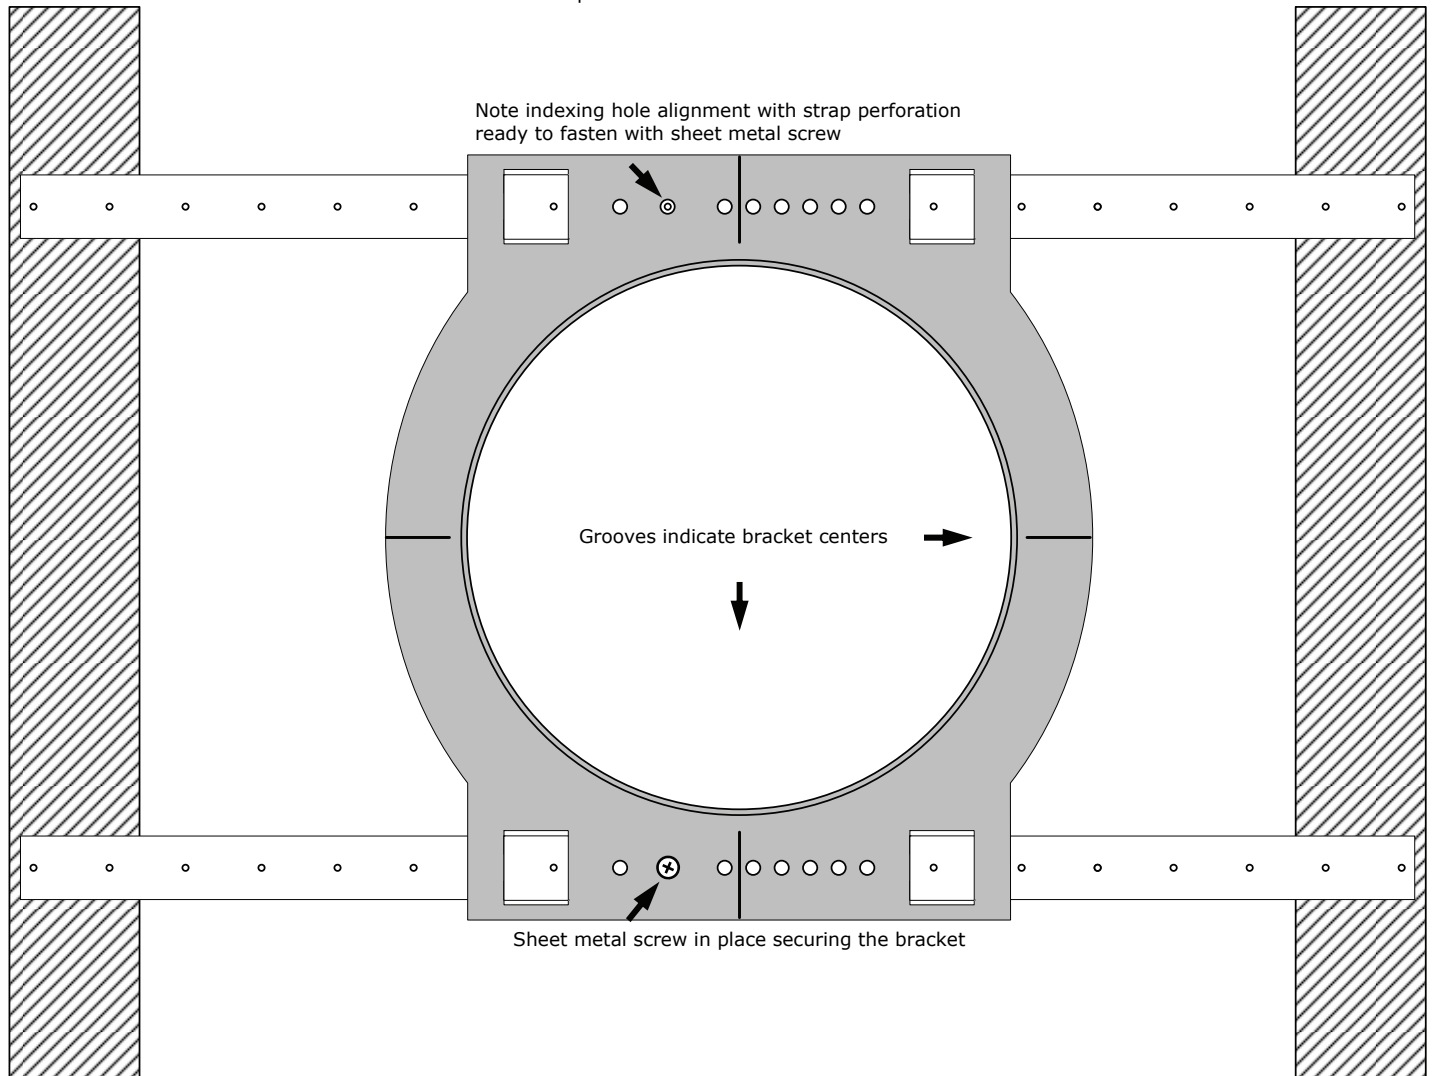

Side view of Pre-Construction Bracket.

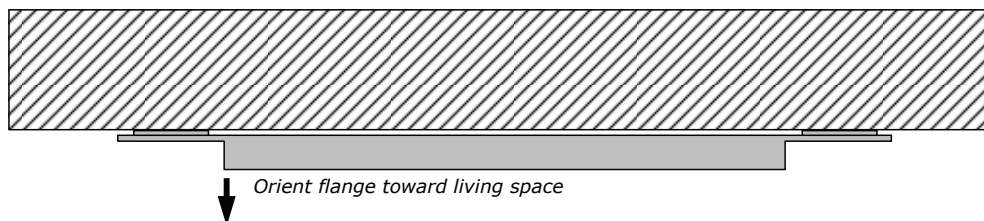

Round Brackets are furnished with 28" straps

Optional 36" straps are available separately

Model Pre-36S